

Amramp Enclosed VPL

The Amramp Enclosed Vertical Platform offers an anti-corrosion frame and top dome making it ideal for outdoor applications. This model includes a ventilation system that keeps the interior environment and airflow comfortable.

Equipped with a Direct Acme Screw Drive, the Amramp Enclosed VPL offers smooth acceleration and deceleration while cutting cabin noise and vibration. A series of safety features including; emergency stop button, emergency lowering hand-wheel and obstacle detection offer the peace of mind when operating the lift.



PERFORMANCE SPECIFICATIONS

Application	Residential & Commercial
Power Supply	110VAC & 24VDC
Drive System	Direct Acme Screw Drive
Motor	1 HP, 24VDC
Maximum Capacity	750lbs (340 kg) or 1000lbs (454 kg)
Maximum Travel	Up to 160 inches (406.4 cm)
Travel Speed	12 feet per minute (0.06 m/s)

CONFIGURATIONS & SPECIFICATIONS

Enclosure	Aluminum Framing with Lexan
Tower Configuration	Left & Right Tower Configuration
Platform Configuration	0°, 90° & 180°
Platform Material	Galvanized Steel
Platform Dimension	34" X 54" (864 mm x 1372 mm) 34" X 60" (864 mm x 1524 mm) 36" X 54" (915 mm x 1372 mm) 36" X 60" (915 mm x 1372 mm) Custom: 30" to 42" W & 46" to 66" L


Cabin Height	42" Standard Cab 80" Outdoor Full Cab Platform Canopy
--------------	---

TRAVEL OPTIONS

VIS-44	Travel 44 inches with 72" Tower
VIS-64	Travel 64 inches with 92" Tower
VIS-78	Travel 78 inches with 108" Tower
VIS-98	Travel 98 inches with 126" Tower
VIS-115	Travel 115 inches with 158" Tower
VIS-130	Travel 130 inches with 158" Tower
VIS-160	Travel 160 inches with 190" Tower

COMPLIANCE INFORMATION

Certifications	CSA B613, B355, ASME 17.1, ASME 18.1
----------------	--------------------------------------

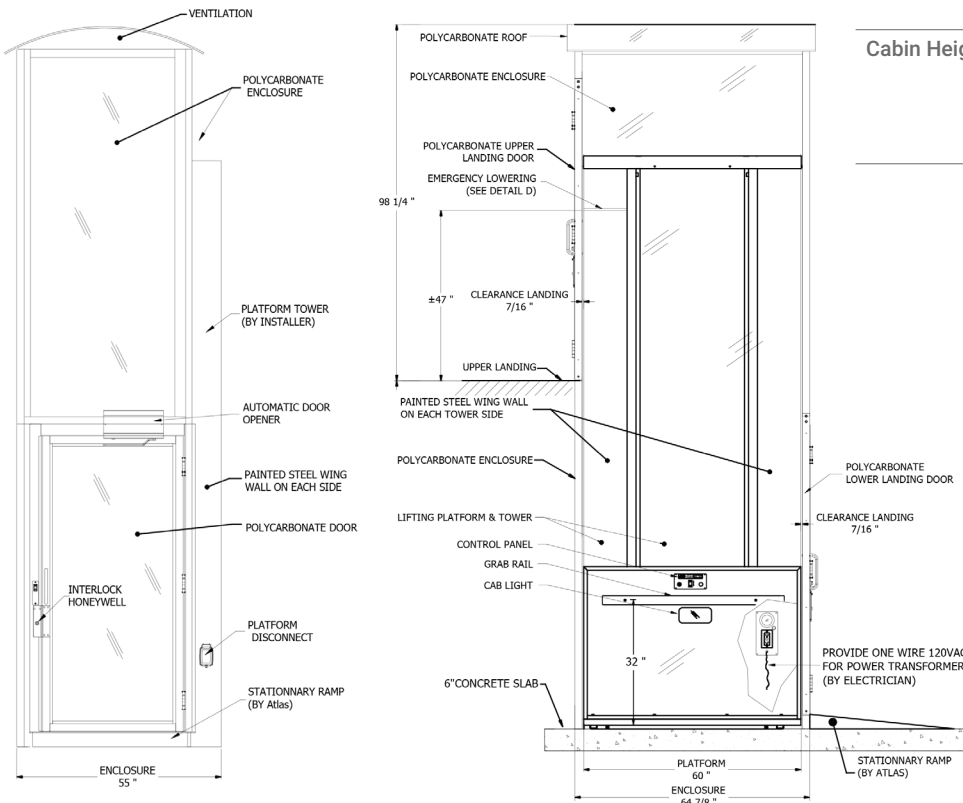

Design your Amramp Enclosed VPL

POWER SUPPLY

110VAC

24VDC

LOAD CAPACITY

750 LBS

1000 LBS

TRAVEL HEIGHT

44" 64" 78" 98" 115"
130" 160"

CABIN HEIGHT

42" Standard Cabin
80" Outdoor Full Cabin

PLATFORM CONFIGURATION

0° Degree
90° Degree
180° Degree

Platform Dimensions

34" X 54" (864 mm x 1372 mm)

34" X 60" (864 mm x 1524 mm)

36" X 54" (915 mm x 1372 mm)

36" X 60" (915 mm x 1372 mm)

Custom: 30" to 42" W & 46" to 66" L

CALL STATIONS

Flush Mounted

Surface Mounted

Call Post

Top Gate Frame Mounted

No Key

Type 455

Type 2252 (Included in Commercial Kit)

DOOR AND GATES

Lower & Upper Landing Orientation

34" or 36" X 42" Lexan Gate

32", 38", 40" or 42" X 42" Lexan Gate

36" X 80" - Lexan Door

38" X 80" - Lexan Door

PAINT

Electro Static Paint

Standard Color Atlas Grey

Custom Color (RAL Universal Chart)

Stainless Steel

STANDARD EQUIPMENT

Safety Underpan

Emergency Alarm

Galvanized Steel Platform 42" H

Emergency Lowering Device

Key Lock Switches

Pit Switches

Continuous Pressure Rocker
Switches

Aluminum and Lexan Enclosure

For pricing and ordering

Contact our National Call Center

By phone: 800-649-5215

By email: callcenter@amramp.com

